

**XT Series Plug-in
16A, SPCO**



The XT series relays are a new generation of plug in relays featuring a clear case and extra strong pins for greater mechanical strength. Also features a manual test lever as standard and a sensitive 400mW coil with built in led indication and suppression diode. Suitable for RT series DIN rail sockets.

| | |
|---------------------------|---|
| Contact arrangement | Single pole changeover |
| Contact material | Silver nickel |
| Contact rating | 16A at 230V ac, 30V dc |
| Nominal coil power | 400mW |
| Mechanical switching life | 10 million dc, 5 million ac version |
| Dielectric strength | 4kV/8mm coil contact gap vde 0700 class 2 |
| Temperature | -40°C to + 85°C |
| Approvals | UL, VDE, CSA |

| Stock No. | Manf Ref' | Type | Unit Price | | |
|-----------|-----------|-------------|------------|-------|------|
| | | | 1-24 | 25-99 | 100+ |
| 4954913 | XT374LC4 | SPCO-12VDC | 3.23 | 2.91 | 2.75 |
| 4954907 | XT374T30 | SPCO-230VAC | 5.29 | 4.76 | 4.50 |

**XT Series Plug-in
8A, DPCO**




The XT series relays are a new generation of plug in relays featuring a clear case and extra strong pins for greater mechanical strength. Also features a manual test lever as standard and a sensitive 400mW coil with built in led indication and suppression diode. Suitable for RT series DIN rail sockets.

| | |
|---------------------------|---|
| Contact arrangement | Double pole changeover |
| Contact material | Silver nickel |
| Contact rating | 8A at 230V ac, 30V dc |
| Nominal coil power | 400mW |
| Mechanical switching life | 10 million dc, 5 million ac version |
| Dielectric strength | 4kV/8mm coil contact gap vde 0700 class 2 |
| Temperature | -40°C to + 85°C |
| Approvals | UL, VDE, CSA |

| Stock No. | Manf Ref' | Type | Unit Price | | |
|-----------|-----------|-------------|------------|-------|------|
| | | | 1-24 | 25-99 | 100+ |
| 4954916 | XT484LC4 | DPCO-12VDC | 3.84 | 3.46 | 3.26 |
| 4954910 | XT484T30 | DPCO-230VAC | 5.80 | 5.22 | 4.93 |

**RT DIN Rail Socket
5mm Pinning**

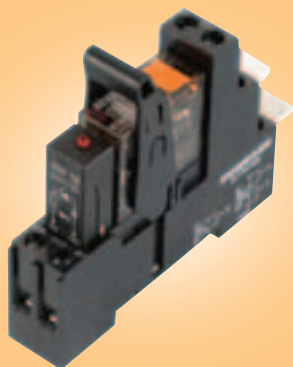

A din rail socket suitable to mount relays with 5mm pinning from the XT range of relays. Can be used with double pole or single pole relay. Note socket is rated to 12A per terminal. If using full 16A of single pole relay rating ensure terminals 11-21, 12-22 and 14-24 are bridged to enhance the rating. Available with a retaining clip to hold relay in place and a variety of protection and indication modules.

| Stock No. | Manf Ref' | Type | Unit Price | | |
|-----------|-----------|-------------------------------|------------|-------|------|
| | | | 1-24 | 25-99 | 100+ |
| 4954295 | RT78726 | 5MM PINNING | 2.20 | 1.98 | 1.87 |
| 4954296 | RT17016 | CLIP | 0.12 | 0.11 | 0.10 |
| 4953039 | PTMT00A0 | DIODE MODULE | 1.50 | 1.35 | 1.28 |
| 4954033 | PTML0524 | LED MODULE | 1.58 | 1.03 | 0.71 |
| 4954036 | PTML0024 | 6 to 24 VAC/DC | 1.58 | 1.03 | 0.71 |
| | | LED/DIODE | | | |
| 4954039 | PTML0730 | MODULE 6 to 24 VDC | 1.62 | 1.05 | 0.73 |
| | | LED MODULE FOR 110 to 230 VAC | | | |