


**SR6Z Safety Relay Module
6 Pole, width**

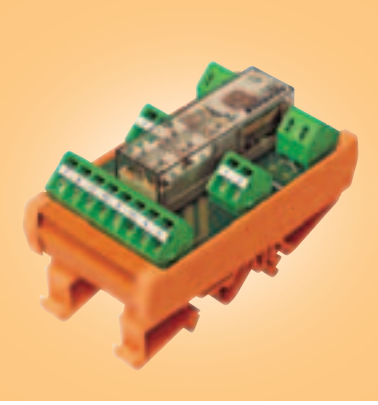

The SR6Z safety relay module provides a convenient means of mounting TYCO SR6 safety relays on Din rail. In applications not requiring a full safety monitoring relay these modules can provide a cost effective means to system design. Available in a variety of configurations and coil voltages, consult sales for full range. Connection by spring clamp terminals, wire range 0.2 to 2.5 mm².

Contact arrangement	4 N/O and 2 N/C or 5 N/O and 1 N/C
Contact material	Silver Tin Oxide
Continuous current	8A at 230/400 VAC
Contact load min	10mA 5VDC
Nominal coil power	1200mW
Coil resistance ohm	480 (24V), 1920 (48V), 10800 (110V)
Mechanical life	10 million
Dielectric strength	3000Vrms
Temperature	-25°C to + 70°C
Approvals	VDE, UL, CSA
Dimensions	W = 20mm, L = 87mm, H = 54mm

Stock No.	Manf Ref'	Type	Unit Price		
			1-24	25-99	100-249
4953118	SR6Z-B024	4N/O+2N/C 24VDC	37.35	33.62	31.75
4953119	SR6Z-C024	5N/O+1N/C 24VDC	37.35	33.62	31.75

**SR2Z Safety Relay Module
2 Pole, width**



The SR2Z safety relay module provides a convenient means of mounting TYCO SR2 safety relays on Din rail. In applications not requiring a full safety monitoring relay these modules can provide a cost effective means to system design. Available in a variety of configurations and coil voltages, consult sales for full range. Connection by spring clamp terminals, wire range 0.2 to 2.5 mm².

Contact arrangement	2 C/O
Contact material	Silver Nickle
Continuous current	6A at 230/400 VAC
Contact load min	10mA 5VDC
Nominal coil power	700mW
Coil resistance ohm	823 (24V), excludes led current
Mechanical life	10 million
Dielectric strength	4000Vrms
Temperature	-25°C to + 70°C
Approvals	VDE, UL, CSA
Dimensions	W = 46mm, L = 87mm, H = 54mm

Stock No.	Manf Ref'	Type	Unit Price		
			1-24	25-99	100-249
4953115	SR2Z-Y024	2C/O 24VDC	21.07	18.96	17.91