
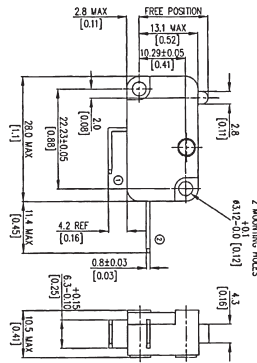


**Positive Action
Single Break Microswitches**





A single pole miniature microswitch with normally closed positive break contacts which are forced open to 3mm (min gap), even in the event of welding. Featuring standard plunger actuator and 6.3mm 'push-on' terminals.

Electrical rating	10 A at 250 VAC (resistive)
Contacts / Material	Single break positive action / Silver Cad. Ox.
Mechanical life	10 ⁶
Temperature	-40° C to +85° C
IP Rating	IP40
Housing / Plunger	Glass reinforced polyamide / Polyamide
Operating force.N	4.5
Total travel force.N	4.8
Free position.mm	15.8
Overtravel.mm	Depress to case
Operating characteristics	are specified from mounting holes
Approvals	UL, CSA

Stock No.	Manf Ref'	Type	Unit Price		
			1-24	25-249	250+
2191423	BVM3FULS	PLUNGER	1.45	1.31	1.11

**Positive Action
Single Break Microswitches**

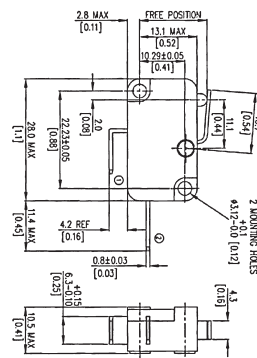
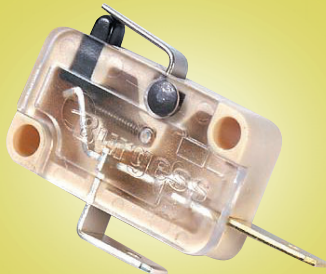


A single pole miniature microswitch with normally closed positive break contacts which are forced open to 3mm (min gap), even in the event of welding. Featuring a standard (13.7mm) or extended (26.2mm) plain levers and 6.3mm 'push-on' terminals.

Electrical rating	10 A at 250 VAC (resistive)
Contacts / Material	Single break positive action / Silver Cad. Ox.
Mechanical life	10 ⁶
Temperature	-40° C to +85° C
IP Rating	IP40
Housing / Lever	Glass reinforced polyamide / Stainless steel
Operating force.N	4.5
Total travel force.N	4.8
Free position.mm	16.8
Overtravel.mm	Depress to case
Operating characteristics	are specified from mounting holes
Approvals	UL, CSA

Stock No.	Manf Re'	Type	Unit Price		
			1-24	25-249	250+
2191432	BVM3FYULS	LEVER 13.7	1.73	1.56	1.32
2191426	BVM3FY1ULS	LEVER 26.2	2.33	2.10	1.78

**Positive Action
Single Break Microswitches**

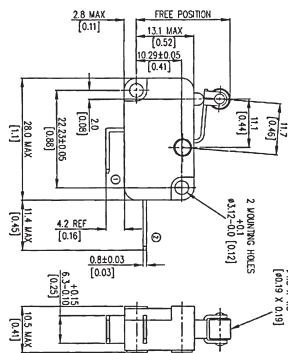

A single pole miniature microswitch with normally closed positive break contacts which are forced open to 3mm (min gap), even in the event of welding. Featuring a roller lever actuator (11.7mm) and 6.3mm 'push-on' terminals.

Electrical rating	10 A at 250 VAC (resistive)
Contacts / Material	Single break positive action / Silver Cad. Ox.
Mechanical life	10 ⁶
Temperature	-40° C to +85° C
IP Rating	IP40
Housing / Lever	Glass reinforced polyamide / Stainless steel
Operating force.N	5
Total travel force.N	5.5
Free position.mm	22.35
Overtravel.mm	Depress to case
Operating characteristics	are specified from mounting holes
Approvals	UL, CSA

Stock No.	Manf Re'	Type	Unit Price		
			1-24	25-249	250+
2191429	BVM3FYRULS	ROLLER 11.7	1.80	1.62	1.38

< 26

