


**L6 Series
16mm Range**



A modern range of 16mm pushbuttons, selector switches, key switches and lamps manufactured by Idec. All units include a bayonet mount locking lever allowing easy contact installation. Buttons available in round, square or rectangular. Contact assemblies available with pcb mounting option. A selection of products is shown on following pages.

**Emergency Stop Switch
Twist Reset, Ø16mm**

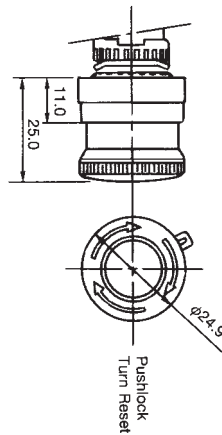

Emergency stop switches for Ø16mm hole mounting with push to lock, twist to reset. Positive action contacts will not operate until the button is locked, complying with EN60947-5-1.

Contact arrangement	2 normally closed
Max. voltage	250V AC/DC
Rated thermal current	3A
Electrical rating	0.1A at 125VAC, 0.1A at 30VDC
Min. switching capacity	1mA at 5V AC/DC
IP Rating	IP65 (front of panel)
Temperature	-25°C to +55°C
Actuator diameter	25mm
Panel cutout	Ø16mm
Conforms to	EN60947-5-1
Approvals	UL, CSA, TUV

Stock No.	Manf Ref ¹	Type	Unit Price		
			1-4	5-9	10-24
5501112	HA1BV2E2R	TWIST RESET	20.31	19.70	19.09

**L6 Selectors and
Key Switches**



L6 series 16mm hole mounting round selector and key switches. To order specify operator and contact block.

Contacts	SPCO or DPCO
Thermal contact rating	5A
IP Rating	IP65
Panel cutout	16.5mm
Approvals	UL, CSA, TUV

Stock No.	Manf Ref ¹	Type	Unit Price		
			1-4	5-9	10-24
Selector Switch Operator					
5501164	LA1S-2Y	ROUND 2 POSITION MAINTAINED	8.72	8.46	8.20
5501165	LA1S-3Y	ROUND 3 POSITION MAINTAINED	8.72	8.46	8.20
5501167	LA1S-21Y	ROUND 2 POSITION SPRING FROM RIGHT	8.72	8.46	8.20
Key Switch Operator					
5501170	LA1K-2A	ROUND 2 POSITION MAINTAINED	13.47	13.07	12.66
5501171	LA1K-3A	ROUND 3 POSITION MAINTAINED	13.47	13.07	12.66
5501168	LA1K-31A	ROUND 2 POSITION SPRING FROM RIGHT	13.47	13.07	12.66
Contact Assembly Non Illuminated Standard Silver					
5501274	HA-C5	SINGLE POLE CHANGEOVER	3.20	3.10	3.01
5501277	HA-C6	DOUBLE POLE CHANGEOVER	3.20	3.10	3.01