


**KUIP Series
10A, DPCO**

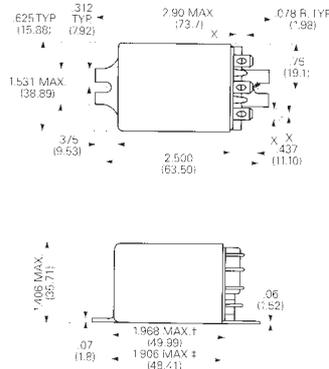


A flange mounted DPCO enclosed relay with a special insulation barrier to gain approval to VDE 0453. It has 8mm spacing between contacts and coil to satisfy needs for insulation between low voltage circuits and power circuits.

Contact arrangement Double pole changeover
 Contact material Silver cadmium oxide
 Contact rating 10A at 240V ac, 10A at 28V dc
 Operate / release time 15ms / 10ms
 Nominal coil power 1.2 W (dc)
 Mechanical switching life 10⁵
 Dielectric strength 2.2kV ac (coil-contact)
 Temperature -45°C to + 95°C (dc),
 Terminals 4.75mm push-on
 Approvals UL, CSA

Stock No.	Manf Ref ¹	Type	Unit Price		
			1-24	25-99	100+
4951920	KUIP11D55-24	DPCO-24VDC	12.75	11.48	10.84

KUHP Series, Flange Mounted 20A, DPCO

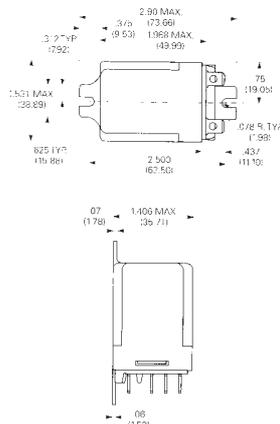


A flange mounted DPCO enclosed power relay with a 20 Amp switching capability.

Contact arrangement Double pole changeover
 Contact material Silver cadmium oxide
 Contact rating 20A at 240V ac, 20A at 28V dc
 Operate / release time 20ms / 20ms
 Nominal coil power 1.2 W (dc), 2.7VA at 50 Hz approx
 Mechanical switching life 10⁷
 Dielectric strength 3.75kV ac (coil-contact)
 Temperature -45°C to + 45°C (ac), -45°C to + 70°C (dc)
 Terminals 6.35mm push-on
 Approvals UL, CSA

Stock No.	Manf Ref ¹	Type	Unit Price		
			1-24	25-99	100+
4951902	KUHP11D51-12	DPCO-12VDC	8.25	7.43	7.01
4951905	KUHP11D51-24	DPCO-24VDC	8.25	7.43	7.01
4951908	KUHP11A51-240	DPCO-240VAC	8.55	7.70	7.27

KUHP Series, Flange Mounted, 30A, SPCO

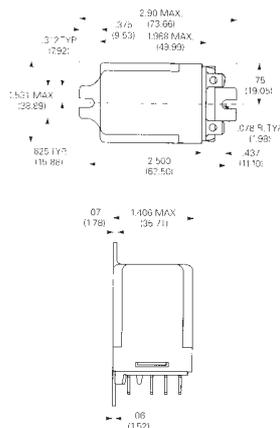


A flange mounted SPCO enclosed power relay with a 30 Amp switching capability.

Contact arrangement Single pole changeover
 Contact material Silver cadmium oxide
 Contact rating 30A at 240V ac, 25A at 28V dc
 Operate / release time 20ms / 20ms
 Nominal coil power 1.2 W (dc), 2.7VA at 50 Hz approx
 Mechanical switching life 10⁷
 Dielectric strength 3.75kV ac (coil-contact)
 Temperature -45°C to + 45°C (ac), -45°C to + 70°C (dc)
 Terminals 6.35mm push-on
 Approvals UL, CSA

Stock No.	Manf Ref ¹	Type	Unit Price		
			1-24	25-99	100+
4951911	KUHP5D51-12	SPCO-12VDC	8.25	7.43	7.01
4951914	KUHP5D51-24	SPCO-24VDC	8.25	7.43	7.01
4951910	KUHP5A51-240	SPCO-240VAC	11.37	10.23	9.66

187 Series, Flange Mounted, 20A, DPCO



A flange mounted DPCO enclosed power relay with a 20 Amp switching capability.

Contact arrangement Double pole changeover
 Contact material Silver cadmium oxide
 Contact rating 20A at 277V ac, 20A at 28V dc
 Operate / release time 20ms / 10ms
 Nominal coil power 1.2 W (dc), 2.7VA at 50 Hz approx
 Mechanical switching life 10⁷
 Dielectric strength 2.5kV ac (coil-contact)
 Temperature -45°C to + 45°C (ac), -45°C to + 70°C (dc)
 Terminals 6.35mm push-on
 Approvals UL, CSA

Stock No.	Manf Ref ¹	Type	Unit Price		
			1-24	25-99	100+
9801048	187-32C200	DPCO-24VDC	9.23	8.31	7.85