


80mm x 25mm Slimline Fans, AC & DC

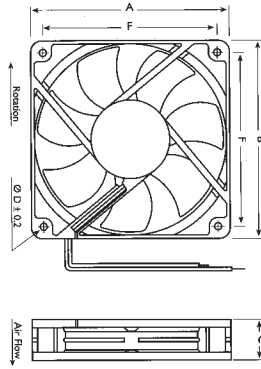


A = 80, B = 80, C = 25, D = 4.5, F = 71.5

Powerful compact axial fans in an industry standard casing. Connection via wire leads 250mm long.

Voltage (50/60Hz)	12VDC	24VDC	110VAC	230VAC
Air Flow (m ³ / h)	67.3	67.3	36	40
Power input (watts)	3	3.84	14	14
Rated speed (RPM)	3100	3100	3000	2500
Noise (dBA)	34.4	34.4	35	33
Bearings	Ball	Ball	Ball	Ball
Casing	DC (PBT, black), AC (aluminium alloy, black)			
Impeller	Black fibreglass reinforced plastic, UL94V-0			
Temperature	DC (-20°C to +70°C), AC (-40°C to +70°C)			
Life expectancy	DC (70,000 hours), AC (40,000 hours)			
Approvals	UL, CUL			

Stock No.	Manf Ref'	Type	Bearings	Unit Price		
				1-9	10-24	25+
7801007	D08A04HWP	12VDC	BALL	11.85	11.02	10.07
7801010	D08A05HWP	24VDC	BALL	11.85	11.02	10.07
7801013	A08A12HWP	110VAC	BALL	12.86	11.96	10.93
7801016	A08A23HWP	230VAC	BALL	12.86	11.96	10.93

80mm x 38mm Fans, AC

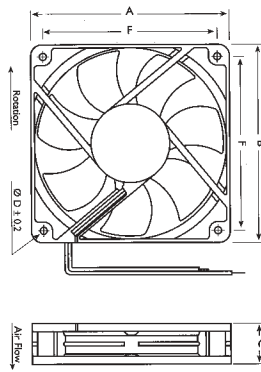


A = 80, B = 80, C = 38, D = 4.5, F = 71.5

Powerful compact axial fans in an industry standard casing. Connection via wire leads 250mm long.

Voltage (50/60Hz)	110VAC	230VAC
Air Flow (m ³ / h)	48	40
Power input (watts)	12	14
Rated speed (RPM)	3000	2500
Noise (dBA)	36	33
Bearings	Sleeve or Ball	Sleeve or Ball
Casing	Aluminium alloy die casting, painted black	
Impeller	Black fibreglass reinforced plastic, UL94V-0	
Temperature	-40°C to +70°C	
Life expectancy	40,000 hours (ball), 30,000 hours (sleeve)	
Approvals	UL, CUL	

Stock No.	Manf Ref'	Type	Bearings	Unit Price		
				1-9	10-24	25+
7801019	A08B12HWS	110VAC	SLEEVE	11.00	10.23	9.35
7801022	A08B23HWS	230VAC	SLEEVE	11.00	10.23	9.35
7801025	A08B12HWP	110VAC	BALL	14.09	13.10	11.98
7801028	A08B23HWP	230VAC	BALL	14.09	13.10	11.98

92mm x 25mm Slimline Fans AC & DC

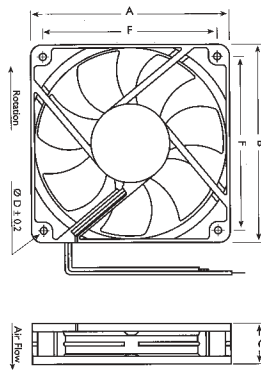


A = 92, B = 92, C = 25, D = 4.5, F = 82.5

Powerful compact axial fans in an industry standard casing. AC fans are connected via 2 x 2.8mm push-ons which will also accept a pre-wired power lead (915mm), DC fans connected via wire leads (250mm long).

Voltage (50/60Hz)	12VDC	24VDC	110VAC	230VAC
Air Flow (m ³ / h)	89.3	89.3	62	50
Power input (watts)	3.0	3.6	14	16
Rated speed (RPM)	2900	2900	2800	2400
Noise (dBA)	35	35	36	32
Bearings	Ball	Ball	Ball	Ball
Casing	DC (PBT, black), AC (aluminium alloy, black)			
Impeller	Black fibreglass reinforced plastic, UL94V-0			
Temperature	DC (-20°C to +70°C), AC (-40°C to +70°C)			
Life expectancy	DC (70,000 hours), AC (40,000 hours)			
Approvals	UL, CUL			

Stock No.	Manf Ref'	Type	Bearings	Unit Price		
				1-9	10-24	25+
7801031	D09A04HWP	12VDC	BALL	13.50	12.56	11.48
7801034	D09A05HWP	24VDC	BALL	13.50	12.56	11.48
7801037	A09A12HTB	110VAC	BALL	13.50	12.56	11.48
7801040	A09A23HTB	230VAC	BALL	13.50	12.56	11.48
7801001	C36	AC POWER LEAD		1.50	1.40	1.28

92mm x 38mm Fans, AC

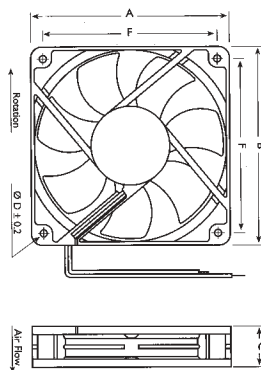

A = 92, B = 92, C = 38, D = 4.3, F = 82.5

Powerful compact axial fans in an industry standard casing. Connection via wire leads 250mm long.

Voltage (50/60Hz)	110VAC	230VAC
Air Flow (m ³ / h)	76	64
Power input (watts)	8	9
Rated speed (RPM)	2800	2400
Noise (dBA)	38	33
Bearings	Ball	
Casing	Aluminium alloy die casting, painted black	
Impeller	Black fibreglass reinforced plastic, UL94V-0	
Temperature	-40°C to +70°C	
Life expectancy	40,000 hours	
Approvals	UL, CUL, (pending)	

Stock No.	Manf Ref'	Type	Bearings	Unit Price		
				1-9	10-24	25+
7801043	A09B12HWP	110VAC	BALL	19.05	17.72	16.19
7801046	A09B23HWP	230VAC	BALL	19.05	17.72	16.19