


M18 Flush, 5mm Sensing

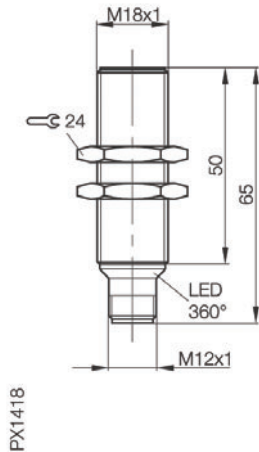


A flush mounted inductive proximity switch from Balluff's Economical Global proximity switch range. M12 connection.

Housing size 18mm (flush)
 Nominal sensing range 5mm
 Supply voltage 10-30 volt DC
 Rated output current 200 mA
 Frequency 700 Hz
 IP Rating IP68
 Body material Nickel plated brass
 Connection type M12 connector, 4 wire type

| Stock No. | Manf Ref' | Type | Connection | Unit Price 1-4 |
|-----------|-----------------------|---------|------------|----------------|
| 2669117 | BES-M18MI-PSC50B-S04K | PNP N/O | M12 4 WIRE | 30.00 |
| 2669120 | BES-M18MI-NSC50B-S04K | NPN N/O | M12 4 WIRE | 30.00 |

M18 Flush, 5mm Sensing

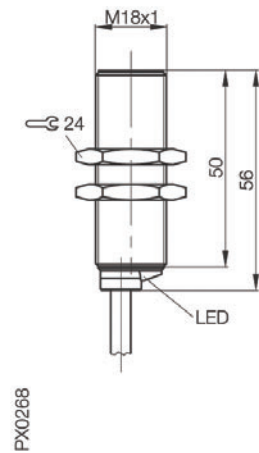


A flush mounted inductive proximity switch from Balluff's Economical Global proximity switch range. Prewired cable.

Housing size 18mm (flush)
 Nominal sensing range 5mm
 Supply voltage 10-30 volt DC
 Rated output current 200 mA
 Frequency 700 Hz
 IP Rating IP68
 Body material Nickel plated brass
 Connection type Cable PVC

| Stock No. | Manf Ref' | Type | Connection | Unit Price 1-4 |
|-----------|-----------------------|---------|--------------|----------------|
| 2669123 | BES-M18MI-PSC50B-BV03 | PNP N/O | Cable PVC 3M | 30.00 |

M18 Quasi Flush X2, 8mm Sensing

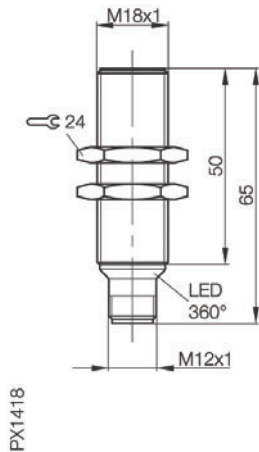


A flush mounted inductive proximity switch from Balluff's Economical Global proximity switch range featuring extended sensing range. M12 connection.

Housing size 18mm (flush)
 Nominal sensing range 8mm
 Supply voltage 10-30 volt DC
 Rated output current 200 mA
 Frequency 150 Hz
 IP Rating IP68
 Body material Nickel plated brass
 Connection type M12 connector, 4 wire type

| Stock No. | Manf Ref' | Type | Connection | Unit Price 1-4 |
|-----------|-----------------------|---------|------------|----------------|
| 2669126 | BES-M18MI-PSC80B-S04K | PNP N/O | M12 4 WIRE | 30.00 |
| 2669129 | BES-M18MI-NSC80B-S04K | NPN N/O | M12 4 WIRE | 30.00 |

M18 Quasi Flush X2, 8mm Sensing

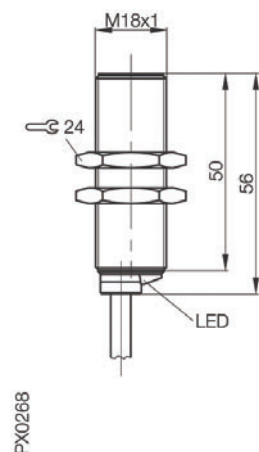

A flush mounted inductive proximity switch from Balluff's Economical Global proximity switch range featuring extended sensing range. Prewired cable.

Housing size 18mm (flush)
 Nominal sensing range 8mm
 Supply voltage 10-30 volt DC
 Rated output current 200 mA
 Frequency 150 Hz
 IP Rating IP68
 Body material Nickel plated brass
 Connection type Cable PVC

| Stock No. | Manf Ref' | Type | Connection | Unit Price 1-4 |
|-----------|-----------------------|---------|--------------|----------------|
| 2669132 | BES-M18MI-PSC80B-BV03 | PNP N/O | Cable PVC 3M | 30.00 |