


**Offset Rotary Lever  
Plastic Housed**




A very reliable, robust limit switch with 1 N/O + 1 N/C positive snap acting changeover contacts housed in a thermoplastic case with a four position metal actuator head. Featuring an offset rotary lever, with left and right action and plastic roller actuator.

Actuator	53 mm offset rotary lever, 19 mm Ø roller
Contact arrangement	1 N/O + 1 N/C changeover
Electrical rating	6 Amp at 250 VAC, 3 Amp at 24 VDC
Operating force min.	28 cmN
Operating travel min.	30°
Total travel max.	75°
Thermal current	10 Amp
IP Rating	IP 66
Temperature	-25°C to +80°C
Housing	Thermoplastic, EN5047
Cable entry	No 13 sealing gland
Approvals	UL, CSA

Stock No.	Manf Ref <sup>1</sup>	Type	Unit Price		
			1-4	5-9	10-24
3265827	83 850 302	OFFSET ROLLER	16.98	16.13	15.28

**Offset Rotary Lever  
Plastic Housed**

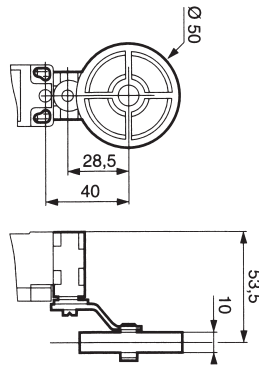


A very reliable, robust limit switch with 1 N/O + 1 N/C positive snap acting changeover contacts housed in a thermoplastic case with a four position metal actuator head. Featuring an offset rotary lever, with left and right action and plastic roller actuator.

Actuator	53.5 mm offset rotary lever, 50 mm Ø roller
Contact arrangement	1 N/O + 1 N/C changeover
Electrical rating	6 Amp at 250 VAC, 3 Amp at 24 VDC
Operating force min.	28 cmN
Operating travel min.	30°
Total travel max.	75°
Thermal current	10 Amp
IP Rating	IP 66
Temperature	-25°C to +80°C
Housing	Thermoplastic, EN5047
Cable entry	No 13 sealing gland
Approvals	UL, CSA

Stock No.	Manf Ref <sup>1</sup>	Type	Unit Price		
			1-4	5-9	10-24
3266349	83 850 306	OFFSET ROLLER	21.11	20.05	19.00

**Adjustable Rotary Lever  
Plastic Housed**





A very reliable, robust limit switch with 1 N/O + 1 N/C positive snap acting changeover contacts housed in a thermoplastic case with a four position metal actuator head. Featuring an adjustable rotary lever, with left and right action and plastic roller actuator.

Actuator	Adjustable rotary lever, Ø 22 mm roller
Contact arrangement	1 N/O + 1 N/C changeover
Electrical rating	6 Amp at 250 VAC, 3 Amp at 24 VDC
Operating force min.	28 cmN
Operating travel min.	30°
Total travel max.	75°
Thermal current	10 Amp
IP Rating	IP 66
Temperature	-25°C to +80°C
Housing	Thermoplastic, EN5047
Cable entry	No 13 sealing gland
Approvals	UL, CSA

Stock No.	Manf Ref <sup>1</sup>	Type	Unit Price		
			1-4	5-9	10-24
3265830	83 850 303	ADJUSTABLE LEVER	18.01	17.11	16.21

**Adjustable Rotary Lever  
Plastic Housed**

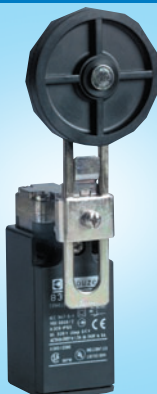

A very reliable, robust limit switch with 1 N/O + 1 N/C positive snap acting changeover contacts housed in a thermoplastic case with a four position metal actuator head. Featuring an adjustable rotary lever, with left and right action and plastic roller actuator.

Actuator	Adjustable rotary lever, Ø 50 mm roller
Contact arrangement	1 N/O + 1 N/C changeover
Electrical rating	6 Amp at 250 VAC, 3 Amp at 24 VDC
Operating force min.	28 cmN
Operating travel min.	30°
Total travel max.	75°
Thermal current	10 Amp
IP Rating	IP 66
Temperature	-25°C to +80°C
Housing	Thermoplastic, EN5047
Cable entry	No 13 sealing gland
Approvals	UL, CSA

Stock No.	Manf Ref <sup>1</sup>	Type	Unit Price		
			1-4	5-9	10-24
3266352	83 850 307	ADJUSTABLE LEVER	23.37	22.20	21.03