
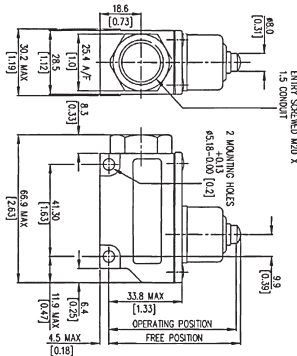


**Double Pole
Metal Cased Microswitch**




A metal-clad switch containing two electrically independent V3, change-over, snap action microswitches. Designed to facilitate fast installation & interior switch replacement, it is ideal for applications where space is at a premium. Cowled protected spring plunger. M20 conduit entry.

Electrical rating 10 A at 250 VAC, 10 A at 30 VDC (resistive)
 Contacts / Material Double pole changeover / Silver
 Mechanical life 10^7
 Temperature -10°C to $+85^{\circ}\text{C}$
 IP Rating IP65
 Housing / Plunger Aluminium / Mild steel zinc plate
 Operating force.N 14.5
 Release force.N 2.2
 Free position.mm 59
 Tripping point.mm 57.1
 Differential travel.mm 1.0
 Overtravel.mm 5.1
 Operating characteristics are specified from mounting holes
 Approvals UL, CSA

Stock No.	Manf Ref'	Type	Unit Price		
			1-9	10-49	50-99
2192041	M2V3HM6S	COWLED PLUNGER	41.43	37.29	31.69

**Double Pole
Metal Cased Microswitch**


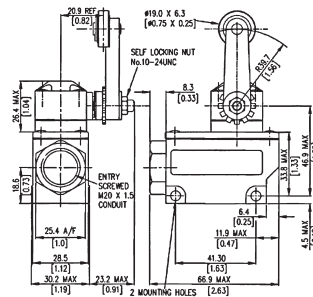


A metal-clad switch containing two electrically independent V3, change-over, snap action microswitches. Designed to facilitate fast installation & interior switch replacement, it is ideal for applications where space is at a premium. Rotary action roller lever which can be mounted in one of four positions and adjusted through 360° in small vernier controlled steps. M20 conduit entry.

Electrical rating 10 A at 250 VAC, 10 A at 30 VDC (resistive)
 Contacts / Material Double pole changeover / Silver
 Mechanical life 10^7
 Temperature -10°C to $+85^{\circ}\text{C}$
 IP Rating IP65
 Housing / Lever Aluminium / Polyamide
 Operating torque.Nm 0.23
 Tripping point 24°
 Overtravel 20°
 Operating characteristics are specified from mounting holes
 Approvals UL, CSA

Stock No.	Manf Ref'	Type	Unit Price		
			1-9	10-49	50-99
2192044	M2V3HM6SA	ROTARY LEVER	47.14	42.43	36.06

**Double Pole Metal Cased
Microswitch**

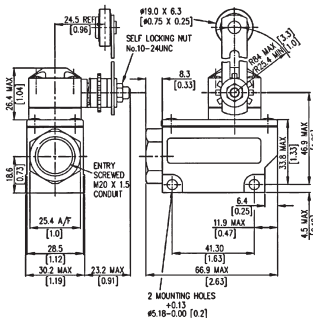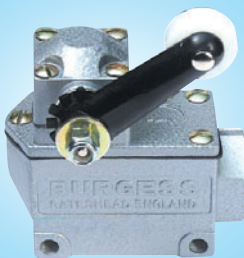


A metal-clad switch containing two electrically independent V3, change-over, snap action microswitches. Designed to facilitate fast installation & interior switch replacement, it is ideal for applications where space is at a premium. Adjustable rotary action roller lever which can be mounted in one of four positions and adjusted through 360° in small vernier controlled steps. M20 conduit entry.

Electrical rating 10 A at 250 VAC, 10 A at 30 VDC (resistive)
 Contacts / Material Double pole changeover / Silver
 Mechanical life 10^7
 Temperature -10°C to $+85^{\circ}\text{C}$
 IP Rating IP65
 Housing / Lever Aluminium / Polyamide
 Operating torque.Nm 0.23
 Tripping point 24°
 Overtravel 20°
 Operating characteristics are specified from mounting holes
 Approvals UL, CSA

Stock No.	Manf Ref'	Type	Unit Price		
			1-9	10-49	50-99
2192047	M2V3HM6SLR	ADJ. ROTARY	Consult for Price		

**Hole Mounted Pre-Wired
Microswitch**

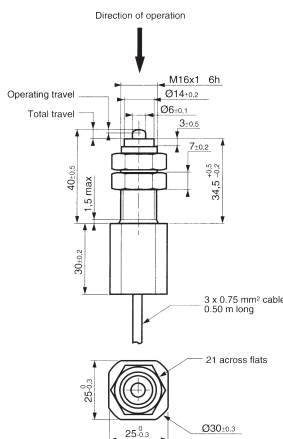

A hole mounted microswitch sealed to IP67 and pre-wired with 0.5 metre of cable. With single pole changeover contacts and featuring a stainless steel plunger actuator. Longer cable lengths can be supplied, please consult sales.

Electrical rating 8 Amp at 250 VAC
 Contact / Material Single pole changeover / Silver nickel
 Mechanical life 10^7
 Operating force min.N 10
 Operating travel min.mm 2
 Total travel.mm 4.5
 IP Rating IP 67
 Temperature -40°C to $+85^{\circ}\text{C}$
 Housing / Plunger Thermoplastic polyester / Stainless steel
 Connections Pre-wired 3 core, 0.5M PVC cable black/common, grey/NC, Blue/NO
 Approvals UL

Stock No.	Manf Ref'	Type	Unit Price		
			1-9	10-49	50-99
3266250	83 589 031	HOLE MOUNTED	26.68	25.34	24.12