

Cod. M309NONC


Standard and Approvals

- Switch according to IEC/EN 60947-3
- Certified UL60947-4-1A and CAN/CSA C22.2 No. 60947-4-1-07
- Suitable as Manual Motor Controller




Contact block

1NO+1NC snap action




Contact travel

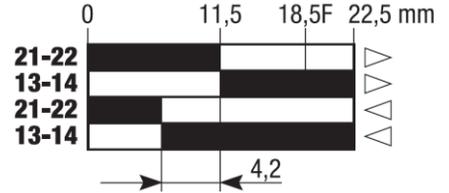

Characteristics


- Thermoplastic body
- Lever length 63,5mm
- 1NO+1NC snap action contact block
- Contact block with positive opening
- Cable screw terminals

Drive cam operating parameters

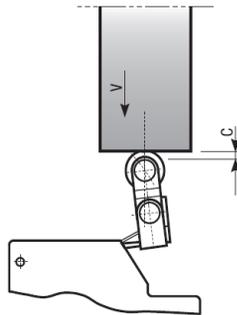

Min. force (cNm)	
for tripping	1,6
for positive opening	12

Dimension

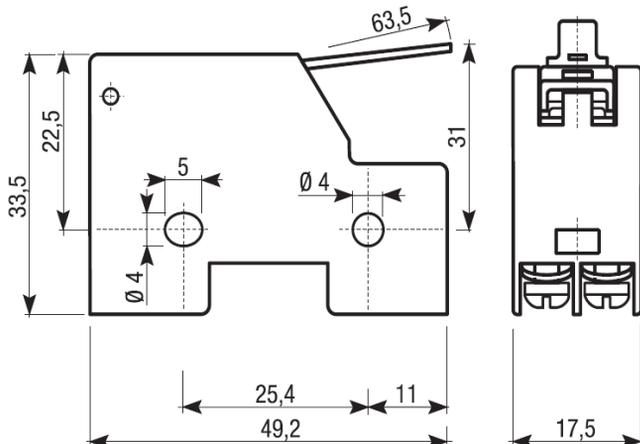

Cable Input



Cable entry with screw

Actuator



09

Lever,
length 63.5 mm

Cod. M309NONC

Technical information

		TIPO	M3				
Maximum operating frequency		operat./hour ¹	1800				
Insulation resistance		500 V DC MΩ	100				
Dielectric strenght		50/60 Hz per 1'	2500 ²				
Rated insulation voltage	Ui	IEC947-5-1	250				
Rated thermal current	Ithe	IEC947-5-1	10				
Rated operating current	Category AC15 A300	Ie IEC947-5-1/EN60947-5-1	24V	A	5		
			125V	A	3		
			230 V	A	1,5		
Contact resistance		IEC255-7 cat.3 initial value	mΩ	25 max			
Short circuit protective devices		IEC269 (IEC947-5-1) fuse type gL or gG	A	3			
Pollution degree		IEC947-5-1	A	3			
Protection degree		EN 60529		IP40			
Vibration resistance		IEC68-2-6	mm	0,35 ± 15% (10 ÷ 55 Hz ± 1 Hz)			
Shock resistance		IEC68-2-27	11ms	g	30		
Mechanical life				cycles	15,000,000		
Electric life	at 250V AC 6A with resistance load cosφ=1			cycles	500.000		
				at 250V AC 6A with inductive load cosφ=0,4		cycles	500.000
Terminals	Type				Screw with combined notch and retractable plate (notch Ph. Size 1)		
	Screw				M3,5		
	Protection degree				IP00 (IP40 with terminals cover)		
	Material				Steel class 8,8 / Galvanized		
	Max. screw tightening torque				120 (12,24)		
	Max connecting capacity		rigid cable	mm ²		2x1,5	
			flexible cable	mm ²		2x1,5	
with prod terminal					1x1,5		
Terminal numbering					In accordance with EN50013		
Air ambient temperature		operational	°C		-25 ÷ +85 (without formation of ice)		
Relative umidity		operational			95% max		

¹ One operation cycle means two movements, one to close and one to open as required by EN 60947-5

² Between terminals with different polarity; between live mechanical parts and ground; between live mechanical parts and non-current-carrying metal parts