



Microswitches, 5 Amp

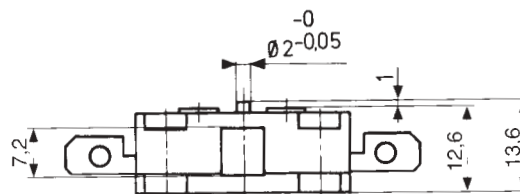


A 5 amp changeover microswitch with 1 N/O and 1 N/C contacts available with 6.35 mm push-on, screw fastened or face mounted solder terminals. Available in a wide range of levers which can be factory fitted for volume customers, (consult sales for part numbers). Optional mounting plates provide quick/easy installation.


Electrical rating	5 Amp at 250 volt
Contacts / Material	1 N/O + 1 N/C, Silver nickel
Mechanical life	10 ⁶
Temperature	-20 to +85°C
IP Rating	IP40
Housing	Polyamide
Levers	Passivated mild steel, polyamide roller
Mounting plates	Passivated mild steel (zinc)
Approvals	UL, NF, cUL
Operating force max.	4 N
Release force min.	1 N
Tripping point	11.45mm (end terms), 12.75mm (face terms)
Differential travel	0.5 mm
Overtravel min.	0.7 mm
Operating characteristics specified from mounting holes without levers	

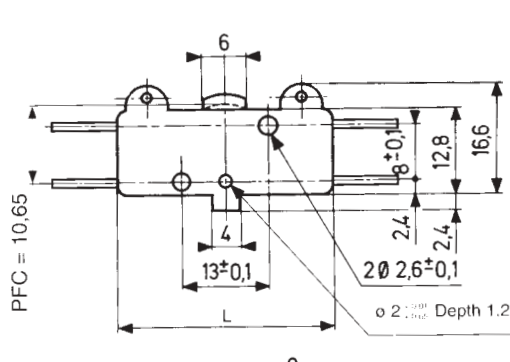


Connections




W2 Solder End Terminals




W2 Solder Side Terminals



W3 for 6.35mm push-on




Side plate




Extended side plate


Levers for Crouzet Microswitches




Plain 49 mm




Plain screw adjusted 49 mm



Roller 47 mm



Roller screw adjusted 26 mm



Roller Ball

Stock No.	Manufactures Ref'	Terminals	Contacts	Type	Lever Type/Length	Unit Price		
						1-9	10-49	50+
3265359	83 106 071	SCREW	Ag	W1		6.59	6.06	5.21
3265365	83 109 004	FACE MOUNTED	Ag	W2		9.20	8.46	7.27
3265350	83 106 022	STANDARD END	Ag	W3		6.59	6.06	5.21
3265152	70 500 888				PLAIN 49MM	0.46	0.42	0.36
3265137	70 500 828				PLAIN SCREW ADJ. 49MM	1.18	1.09	0.93
3265134	70 500 813				ROLLER 47MM	0.88	0.81	0.70
3265143	70 500 840				ROLLER SCREW ADJ. 26MM	1.51	1.39	1.19
3266196	83 109 015				ROLLER BALL (FACTORY FITTED)	10.80	9.94	8.53
3265110	70 500 216				SIDE PLATE	1.18	1.09	0.93
3265116	70 500 208				EXTENDED SIDE PLATE	1.50	1.38	1.19