


## M12 Quasi Flush X3, 6mm Sensing

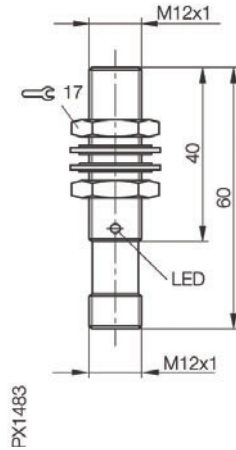


PX1483

A quasi flush mounted inductive proximity switch from Balluff's Economical Global Tripleprox switch range offering 3 times switching range.

Housing size	12mm (quasi flush)
Nominal sensing range	6mm
Supply voltage	10-30 volt DC
Rated output current	200 mA
Frequency	800 Hz
IP Rating	IP67
Body material	Chrome plated brass
Connection type	M12 connector, 4 wire type

Stock No.	Manf Ref'	Type	Connection	Unit Price 1-4
2669099	BES-M12MG1-PSC60B-S04G	PNP N/O	M12 4 WIRE	47.29
2669102	BES-M12MG1-PSC60B-S04G	NPN N/O	M12 4 WIRE	47.29

## M12 Flush Steelface, 2mm Sensing

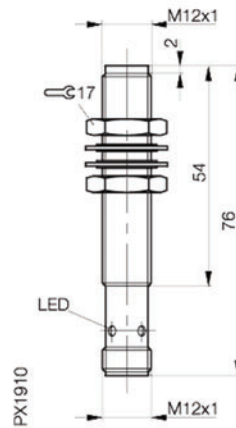


PX1910

A stainless steel faced flush mounted inductive proximity switch from Balluff's Economical Global proximity switch range.

Housing size	2mm (flush)
Nominal sensing range	2mm
Supply voltage	10-30 volt DC
Rated output current	130 mA
Frequency	50 Hz
IP Rating	IP67
Body material	Stainless steel
Connection type	M12 connector, 4 wire type

Stock No.	Manf Ref'	Type	Connection	Unit Price 1-4
2669105	BES-EG1-PSC20S-S04G-S	PNP N/O	M12 4 WIRE	70.74
2669108	BES-EG1-NSC20S-S04G-S	NPN N/O	M12 4 WIRE	70.74

## M12 Flush Weld Immune, 3mm Sensing

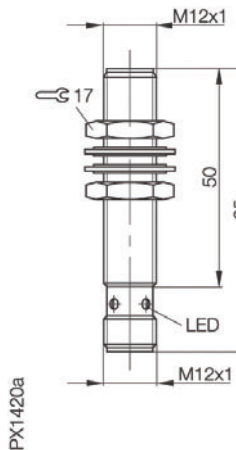


PX1420a

A flush mounted inductive proximity switch which is PTFE coated and consequently immune from weld splatter. This model also features multimetal technology which allows you to sense other metals such as aluminium or copper without a reduction in sensing distance.

Housing size	12mm (flush)
Nominal sensing range	3mm
Supply voltage	10-30 volt DC
Rated output current	200 mA
Frequency	2000 Hz
IP Rating	IP67
Body material	Brass PTFE coated
Connection type	M12 connector, 4 wire type

Stock No.	Manf Ref'	Type	Connection	Unit Price 1-4
2669101	BES-M12ML-PSC30A-S04G-W	PNP N/O	M12 4 WIRE	52.26

## M12 Non Flush Weld Immune, 8mm Sensing

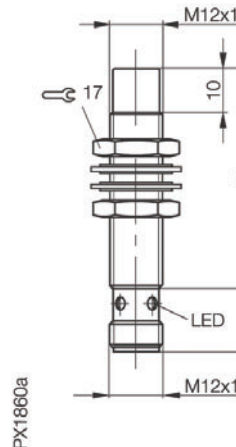

PX1860a

A non flush mounted inductive proximity switch which is PTFE coated and consequently immune from weld splatter. This model also features multimetal technology which allows you to sense other metals such as aluminium or copper without a reduction in sensing distance.

Housing size	12mm (flush)
Nominal sensing range	8mm
Supply voltage	10-30 volt DC
Rated output current	200 mA
Frequency	2000 Hz
IP Rating	IP67
Body material	Brass PTFE coated
Connection type	M12 connector, 4 wire type

Stock No.	Manf Ref'	Type	Connection	Unit Price 1-4
2669114	BES-M12ML-PSC80E-S04G-W	PNP N/O	M12 4 WIRE	57.95

< 20