


Flexible Metal Rod Lever Safety Switch Steel Housed

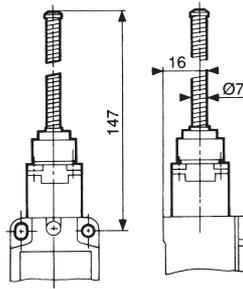


A very reliable, robust safety limit switch with 1 N/O + 1 N/C (positive opening) changeover contacts housed in an all metal construction with a four position metal actuator head. Featuring a flexible metal lever.

Actuator	Flexible metal lever, Ø 7mm
Contact arrangement	1 N/O + 1 N/C (safety) changeover
Electrical rating	6 Amp at 250 VAC, 3 Amp at 24 VDC
Operating force min.	3 N
Operating travel min.	30°
Total travel max.	75°
Thermal current	10 Amp
IP Rating	IP 66
Temperature	-25°C to +80°C
Housing	Steel, EN5041
Cable entry	No 13 sealing gland
Approvals	UL, CSA

Stock No.	Manf Ref ¹	Type	Unit Price		
			1-4	5-9	10-24
3265965	83 861 601	FLEXIBLE ROD	26.61	25.28	23.95

Plunger Safety Switch Steel Enclosed

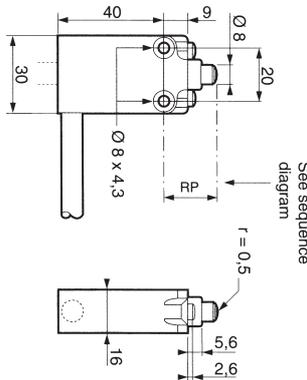


A metal enclosed safety limit switch sealed to IP67 and pre-wired with 1 metre of armoured cable. With 1 N/O + 1 N/C positive break action changeover contacts. Featuring a plain metal plunger actuator.

Actuator	Plain plunger (steel)
Contact arrangement	1 N/O + 1 N/C (safety) changeover
Electrical rating	6 Amp at 250 VAC, 8 Amp at 24 VDC
Operating force min.	10 N
Operating travel min.	4 mm
Total travel	5.1 mm
Thermal current	10 Amp
IP Rating	IP 67
Temperature	-25°C to +70°C
Housing	Steel
Connections	Pre-wired 5 core, 1M cable, ext. Ø 8mm black/black-NC, blue/brown-NO, gr/yell-earth
Mechanical operations	10°
Approvals	UL
Longer cable lengths can be supplied	

Stock No.	Manf Ref ¹	Type	Unit Price		
			1-4	5-9	10-24
3265971	83 870 001	PLAIN PLUNGER	23.98	22.78	21.58

Roller Safety Switch Steel Enclosed

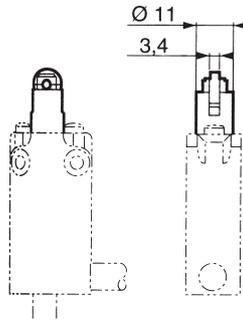


A metal enclosed safety limit switch sealed to IP67 and pre-wired with 1 metre of armoured cable. With 1 N/O + 1 N/C positive break action changeover contacts. Featuring a steel roller plunger actuator.

Actuator	Steel roller plunger
Contact arrangement	1 N/O + 1 N/C (safety) changeover
Electrical rating	6 Amp at 250 VAC, 8 Amp at 24 VDC
Operating force min.	10 N
Operating travel min.	4.1 mm
Total travel	5.1 mm
Thermal current	10 Amp
IP Rating	IP 67
Temperature	-25°C to +70°C
Housing	Steel
Connections	Pre-wired 5 core, 1M cable, ext. Ø 8mm black/black-NC, blue/brown-NO, gr/yell-earth
Mechanical operations	10°
Approvals	UL
Longer cable lengths can be supplied	

Stock No.	Manf Ref ¹	Type	Unit Price		
			1-4	5-9	10-24
3265980	83 871 001	STEEL ROLLER	27.31	25.94	24.58

Hole Mounted Safety Switch Steel Enclosed

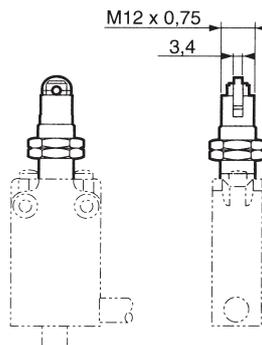

A metal enclosed safety limit switch sealed to IP67 and pre-wired with 1 metre of armoured cable. With 1 N/O + 1 N/C positive break action changeover contacts. Featuring a steel roller plunger actuator.

Actuator	Steel roller plunger
Contact arrangement	1 N/O + 1 N/C (safety) changeover
Electrical rating	6 Amp at 250 VAC, 8 Amp at 24 VDC
Operating force min.	10 N
Operating travel min.	4.15 mm
Total travel	5.15 mm
Thermal current	10 Amp
IP Rating	IP 67
Temperature	-25°C to +70°C
Housing	Steel
Connections	Pre-wired 5 core, 1M cable, ext. Ø 8mm black/black-NC, blue/brown-NO, gr/yell-earth
Mechanical operations	10°
Approvals	UL
Longer cable lengths can be supplied	

Stock No.	Manf Ref ¹	Type	Unit Price		
			1-4	5-9	10-24
3265986	83 872 001	STEEL ROLLER	29.97	28.47	26.97