


**Roller Lever Safety Switch
Steel Enclosed**




A metal enclosed safety limit switch sealed to IP67 and pre-wired with 1 metre of armoured cable. With 1 N/O + 1 N/C positive break action changeover contacts. Featuring a offset lever actuator with left and right action and steel roller actuator.

Actuator 23.6 mm offset rotary lever, Ø 2.6 mm roller
 Contact arrangement 1 N/O + 1 N/C (safety) changeover
 Electrical rating 6 Amp at 250 VAC, 8 Amp at 24 VDC
 Operating force min. 15 cmN
 Operating travel min. 58°
 Total travel 69°
 Thermal current 10 Amp
 IP Rating IP 67
 Temperature -25°C to +70°C
 Housing Steel
 Connections Pre-wired 5 core, 1M cable, ext. Ø 8mm black/black-NC, blue/brown-NO, gr/yell-earth

Mechanical operations 10⁶
 Approvals UL

Stock No.	Manf Ref'	Type	Unit Price		
			1-4	5-9	10-24
3265995	83 873 001	OFFSET ROLLER	26.64	25.31	23.98

**Hole Mounted Safety Switch
Steel Enclosed**




A metal enclosed safety limit switch sealed to IP67 and pre-wired with 1 metre of armoured cable. With 1 N/O + 1 N/C positive snap acting changeover contacts. Featuring a metal plunger actuator with threaded barrel.

Actuator Plain metal plunger with threaded barrel
 Contact arrangement 1 N/O + 1 N/C (safety) changeover
 Electrical rating 6 Amp at 250 VAC, 8 Amp at 24 VDC
 Operating force min. 10 N
 Operating travel min. 4 mm
 Total travel 5.1 mm
 Thermal current 10 Amp
 IP Rating IP 67
 Temperature -25°C to +70°C
 Housing Steel
 Connections Pre-wired 5 core, 1M cable, ext. Ø 8mm black/black-NC, blue/brown-NO, gr/yell-earth

Mechanical operations 10⁶
 Approvals UL

Stock No.	Manf Ref'	Type	Unit Price		
			1-4	5-9	10-24
3266004	83 874 001	THREADED BARREL	26.64	25.31	23.98

**Plunger Safety Switch
Steel Enclosed**

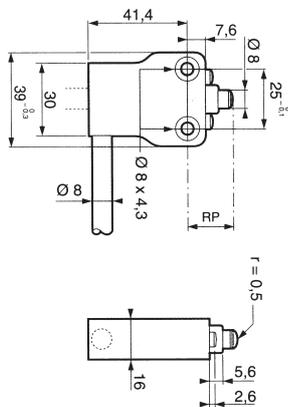


A metal enclosed safety limit switch sealed to IP67 and pre-wired with 1 metre of armoured cable. With 1 N/O + 1 N/C positive break action changeover contacts. Featuring a plain metal plunger actuator.

Actuator Plain plunger (steel)
 Contact arrangement 1 N/O + 1 N/C (safety) changeover
 Electrical rating 6 Amp at 250 VAC, 8 Amp at 24 VDC
 Operating force min. 10 N
 Operating travel min. 4 mm
 Total travel 5.1 mm
 Thermal current 10 Amp
 IP Rating IP 67
 Temperature -25°C to +70°C
 Housing Steel
 Connections Pre-wired 5 core, 1M cable, ext. Ø 8mm black/black-NC, blue/brown-NO, gr/yell-earth

Mechanical operations 10⁶
 Approvals UL
 Longer cable lengths can be supplied

Stock No.	Manf Ref'	Type	Unit Price		
			1-4	5-9	10-24
3266031	83 880 001	PLAIN PLUNGER	26.30	24.99	23.67

**Roller Safety Switch
Steel Enclosed**



A metal enclosed safety limit switch sealed to IP67 and pre-wired with 1 metre of armoured cable. With 1 N/O + 1 N/C positive break action changeover contacts. Featuring a steel roller plunger actuator.

Actuator Steel roller plunger
 Contact arrangement 1 N/O + 1 N/C (safety) changeover
 Electrical rating 6 Amp at 250 VAC, 8 Amp at 24 VDC
 Operating force min. 10 N
 Operating travel min. 4.15 mm
 Total travel 5.15 mm
 Thermal current 10 Amp
 IP Rating IP 67
 Temperature -25°C to +70°C
 Housing Steel
 Connections Pre-wired 5 core, 1M cable, ext. Ø 8mm black/black-NC, blue/brown-NO, gr/yell-earth

Mechanical operations 10⁶
 Approvals UL
 Longer cable lengths can be supplied

Stock No.	Manf Ref'	Type	Unit Price		
			1-4	5-9	10-24
3266040	83 881 001	STEEL ROLLER	30.04	28.54	27.04