


**Roller Lever Safety Switch  
Steel Enclosed**




A metal enclosed safety limit switch sealed to IP67 and pre-wired with 1 metre of armoured cable. With 1 N/O + 1 N/C positive break action changeover contacts. Featuring a offset lever actuator with left and right action and steel roller actuator. Longer cable lengths can be supplied.

Actuator	23.6 mm offset rotary lever, Ø 2.6 mm roller
Contact arrangement	1 N/O + 1 N/C (safety) changeover
Electrical rating	6 Amp at 250 VAC, 8 Amp at 24 VDC
Operating force min.	15 cmN
Operating travel min.	58°
Total travel	69°
Thermal current	10 Amp
IP Rating	IP 67
Temperature	-25°C to +70°C
Housing	Steel
Connections	Pre-wired 5 core, 1M cable, ext. Ø 8mm black/black-NC, blue/brown-NO, gr/yell-earth
Mechanical operations	10 <sup>6</sup>
Approvals	UL

Stock No.	Manf Ref <sup>1</sup>	Type	Unit Price		
			1-4	5-9	10-24
3266058	83 883 001	OFFSET ROLLER	29.30	27.84	26.37

**Hole Mounted Safety Switch  
Steel Enclosed**




A metal enclosed safety limit switch sealed to IP67 and pre-wired with 1 metre of armoured cable. With 1 N/O + 1 N/C positive break action changeover contacts. Featuring a metal plunger actuator with threaded barrel. Longer cable lengths can be supplied, please consult sales.

Actuator	Plain metal plunger with threaded barrel
Contact arrangement	1 N/O + 1 N/C (safety) changeover
Electrical rating	6 Amp at 250 VAC, 8 Amp at 24 VDC
Operating force min.	10 N
Operating travel min.	4 mm
Total travel	5.1 mm
Thermal current	10 Amp
IP Rating	IP 67
Temperature	-25°C to +70°C
Housing	Steel
Connections	Pre-wired 5 core, 1M cable, ext. Ø 8mm black/black-NC, blue/brown-NO, gr/yell-earth
Mechanical operations	10 <sup>6</sup>
Approvals	UL

Stock No.	Manf Ref <sup>1</sup>	Type	Unit Price		
			1-4	5-9	10-24
3266067	83 884 001	THREADED BARREL	25.48	24.21	22.93

**Hole Mounted Switch  
Plunger**

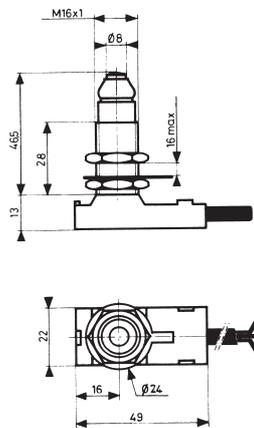


A precision movement detector with a single pole changeover contact in a M16 threaded barrel sealed to IP66. Featuring a plain plunger actuator and supplied pre-wired with a single pole changeover contact.

Actuator	Plunger with M16 threaded barrel
Contact arrangement	Single pole changeover
Electrical rating	5 Amp at 250 VAC
Operating force min.	15 N
Operating travel min.	2 mm
Total travel	6 mm
Thermal current	12 Amp
IP Rating	IP 66
Temperature	-5°C to +70°C
Housing	Steel
Connections	Pre-wired 3 core, 1M cable, ext. Ø 7.6mm black/common, brown/NC, blue/NO

Mechanical operations	10 <sup>6</sup>
Approvals	CSA A300
Longer cable lengths can be supplied	

Stock No.	Manf Ref <sup>1</sup>	Type	Unit Price		
			1-4	5-9	10-24
3266355	83 731 319	PLAIN PLUNGER	35.57	33.79	32.01

**Hole Mounted Switch  
Roller Plunger**



A precision movement detector with a single pole changeover contact in a M16 threaded barrel sealed to IP56. Featuring a roller plunger actuator and supplied pre-wired with 1M PVC cable.

Actuator	Roller plunger with M16 threaded barrel
Contact arrangement	Single pole changeover
Electrical rating	5 Amp at 250 VAC
Operating force min.	15 N
Operating travel min.	2 mm
Total travel	6 mm
Thermal current	12 Amp
IP Rating	IP 56
Temperature	-5°C to +70°C
Housing	Steel
Connections	Pre-wired 3 core, 1M cable, ext. Ø 7.6mm black/common, brown/NC, blue/NO

Mechanical operations	10 <sup>6</sup>
Approvals	CSA A300
Longer cable lengths can be supplied	

Stock No.	Manf Ref <sup>1</sup>	Type	Unit Price		
			1-4	5-9	10-24
3266358	83 732 315	ROLLER PLUNGER	38.19	36.28	34.37