


**Standard Microswitch
Plain Lever, 15 Amp**




A single pole, snap action, changeover microswitch incorporating a beryllium copper trident spring mechanism, silver contacts and accessible screw terminals. Featuring a 63.5 mm plain lever actuator with a return spring.

Electrical rating	15 A at 250 VAC, 7 A at 30 VDC
Contacts / Material	Single pole changeover / Silver
Mechanical life	10 ⁷
Temperature	-10° C to +85° C
IP Rating	IP40
Housing / Lever	Phenolic / Stainless steel 63.5mm
Operating force.N	0.9
Release force.N	0.1
Pretravel.mm	-
Tripping point.mm	19
Differential travel.mm	0.04
Overtravel.mm	5.6
Operating characteristics are specified from mounting holes	
Approvals	UL, CSA

Stock No.	Manf Ref'	Type	Unit Price		
			1-9	10-49	50-99
2193385	PN4K63	PLAIN LEVER	5.76	5.18	4.41

**Standard Microswitch
Plain Lever, 15 Amp**




A single pole, snap action, changeover microswitch incorporating a beryllium copper trident spring mechanism, silver contacts and accessible screw terminals. Featuring a 152 mm plain lever actuator.

Electrical rating	15 A at 250 VAC, 7 A at 30 VDC
Contacts / Material	Single pole changeover / Silver
Mechanical life	10 ⁷
Temperature	-10° C to +85° C
IP Rating	IP40
Housing / Lever	Phenolic / Stainless steel 63.5 mm
Operating force.N	0.3
Release force.N	0.1
Pretravel.mm	-
Tripping point.mm	25.5
Differential travel.mm	3
Overtravel.mm	10
Operating characteristics are specified from mounting holes	
Approvals	UL, CSA
PLEASE CONSULT SALES FOR PRICE	

Stock No.	Manf Ref'	Type	Unit Price		
			1-9	10-49	50-99
2193382	PN4K152	PLAIN LEVER	7.49	6.74	5.73

**Standard Microswitch
Roller Lever, 15 Amp**

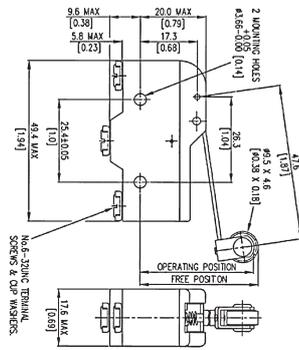


A single pole, snap action, changeover microswitch incorporating a beryllium copper trident spring mechanism, silver contacts and accessible screw terminals. Featuring a 48.2 mm roller lever actuator.

Electrical rating	15 A at 250 VAC, 7 A at 30 VDC
Contacts / Material	Single pole changeover / Silver
Mechanical life	10 ⁷
Temperature	-10° C to +85° C
IP Rating	IP40
Housing / Lever	Phenolic / Stainless steel 47.6 mm
Operating force.N	1.1
Release force.N	0.2
Pretravel.mm	-
Tripping point.mm	30.2
Differential travel.mm	0.9
Overtravel.mm	4.2
Operating characteristics are specified from mounting holes	
Approvals	UL, CSA

Stock No.	Manf Ref'	Type	Unit Price		
			1-9	10-49	50-99
2193391	PN4GK48	ROLLER LEVER	6.80	6.12	5.20

**Standard Microswitch
Roller Lever, 15 Amp**

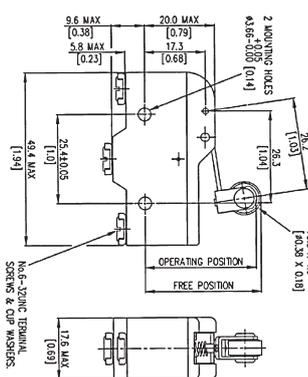

A single pole, snap action, changeover microswitch incorporating a beryllium copper trident spring mechanism, silver contacts and accessible screw terminals. Featuring a 26.7 mm roller lever actuator.

Electrical rating	15 A at 250 VAC, 7 A at 30 VDC
Contacts / Material	Single pole changeover / Silver
Mechanical life	10 ⁷
Temperature	-10° C to +85° C
IP Rating	IP40
Housing / Lever	Phenolic / Stainless steel 26.2 mm
Operating force.N	1.7
Release force.N	0.2
Pretravel.mm	-
Tripping point.mm	30.2
Differential travel.mm	0.5
Overtravel.mm	2
Operating characteristics are specified from mounting holes	
Approvals	UL, CSA

Stock No.	Manf Ref'	Type	Unit Price		
			1-9	10-49	50-99
2193394	PN4GK26	ROLLER LEVER	9.43	8.49	7.21