
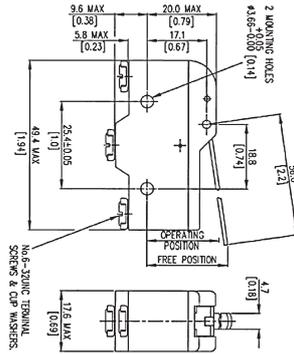


**Standard Microswitch  
Reverse Action, 15 Amp**

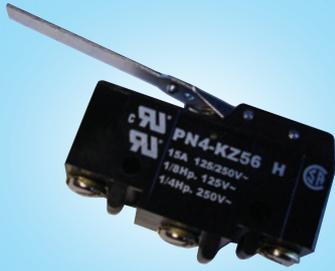


A single pole, snap action, changeover microswitch incorporating a beryllium copper trident spring mechanism, silver contacts and accessible screw terminals. Featuring a reverse action 56mm plain lever actuator to provide increased overtravel.

Electrical rating 15 A at 250 VAC, 7 A at 30 VDC  
 Contacts / Material Single pole changeover / Silver  
 Mechanical life 10<sup>7</sup>  
 Temperature -10° C to +85° C  
 IP Rating IP40  
 Housing / Lever Phenolic / Stainless steel 56 mm  
 Operating force.N 1.5  
 Release force.N 0.5  
 Pretravel.mm -  
 Tripping point.mm 18.5  
 Differential travel.mm 1  
 Overtravel.mm 6  
 Operating characteristics are specified from mounting holes.  
 Approvals UL, CSA

Stock No.	Manf Ref'	Type	Unit Price		
			1-9	10-49	50-99
2193388	PN4KZ56	PLAIN LEVER	6.80	6.12	5.20

**Standard Microswitch  
Reverse Action, 15 Amp**

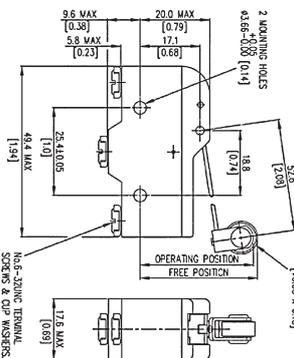


A single pole, snap action, changeover microswitch incorporating a beryllium copper trident spring mechanism, silver contacts and accessible screw terminals. Featuring a reverse action 52.8mm roller lever actuator to provide increased overtravel. UL, CSA approved.

Electrical rating 15 A at 250 VAC, 7 A at 30 VDC  
 Contacts / Material Single pole changeover / Silver  
 Mechanical life 10<sup>7</sup>  
 Temperature -10° C to +85° C  
 IP Rating IP40  
 Housing / Lever Phenolic / Stainless steel 52.8 mm roller  
 Operating force.N 2.2  
 Release force.N 0.8  
 Free position.mm 36.3  
 Tripping point.mm 29.5  
 Differential travel.mm 1.0  
 Overtravel.mm 5.3  
 Operating characteristics are specified from mounting holes  
 PLEASE CONSULT SALES FOR PRICE

Stock No.	Manf Ref'	Type	Unit Price		
			1-9	10-49	50-99
2191555	CT2MRA2UL	ROLLER LEVER	Consult for Price		

**Standard Microswitch  
Hole Mount Plunger, 15 Amp**

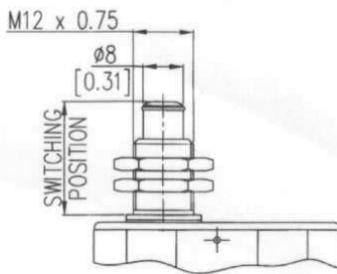


A single pole, snap action, changeover microswitch incorporating a beryllium copper trident spring mechanism, silver contacts and accessible screw terminals. Featuring a hole mounted plunger actuator.

Electrical rating 15 A at 250 VAC, 7 A at 30 VDC  
 Contacts / Material Single pole changeover / Silver  
 Mechanical life 10<sup>5</sup>  
 Temperature -10° C to +85° C  
 IP Rating IP40  
 Housing / Plunger Phenolic / Stainless steel, polyamide roller  
 Operating force.N 3.8  
 Release force.N 1.3  
 Pretravel.mm 0.4  
 Tripping point.mm 21.8  
 Differential travel.mm 0.04  
 Overtravel.mm 5.5  
 Operating characteristics are specified from mounting face.  
 Approvals UL, CSA

Stock No.	Manf Ref'	Type	Unit Price		
			1-9	10-49	50-99
2193397	PN41	HOLE MOUNTED	14.05	12.65	10.75

**Standard Microswitch  
Hole Mount Roller, 15 Amp**

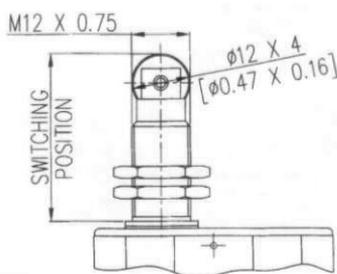

Two single pole, snap action, changeover microswitches incorporating a beryllium copper trident spring mechanism, silver contacts and accessible screw terminals. Available with either, in line or 90° to switch, hole mounted roller plunger actuators. UL & CSA approved.

Electrical rating 15 A at 250 VAC, 7 A at 30 VDC  
 Contacts / Material Single pole changeover / Silver  
 Mechanical life 10<sup>5</sup>  
 Temperature -10° C to +85° C  
 IP Rating IP40  
 Housing / Plunger Phenolic / Stainless steel, polyamide roller  
 Operating force.N 3.8  
 Release force.N 1.3  
 Pretravel.mm 0.4  
 Tripping point.mm 33.3  
 Differential travel.mm 0.04  
 Overtravel.mm 3.5  
 Approvals UL, CSA

Stock No.	Manf Ref'	Type	Unit Price		
			1-9	10-49	50-99
2193400	PN4G	IN-LINE ROLLER	9.84	8.86	7.53
2193403	PN4GH	90° ROLLER	9.84	8.86	7.53