


**MT2 Series Relay
10A, DPCO**

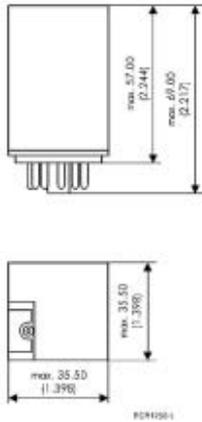


A universal 8 pin 2 pole change over relay rated to 10A. The relays feature a mechanical flag and test lever as standard. LED indication, gold plated or bifurcated contacts and other voltages available on request.

Contact arrangement Double pole changeover
 Contact material Silver nickel
 Continuous current 10A at 230 / 400V ac
 Contact load min. 12V / 10mA, 20mV / 1mA gold flash or bifurcated
 Operate / release time 12 / 5ms
 Nominal coil power 1.2 W dc, 2.3 VA ac
 Coil resistance.ohm 110(12Vdc), 475(24Vdc), 24(12Vac), 86(24Vac)
 Mechanical life 20 Million
 Dielectric strength 2500 Vms
 Temperature -40°C to + 60°C
 Approvals VDE, UL, CSA
 L = 35.5, W = 35.5, H = 69

Stock No.	Manf Ref'	Type	Unit Price		
			1-24	25-99	100+
4954042	MT221012	DPCO-12VDC	4.65	4.19	3.95
4952973	MT221024	DPCO-24VDC	4.65	4.19	3.95
4954163	MT226024	DPCO-24VAC	4.65	4.19	3.95
4954164	MT226115	DPCO-115VAC	4.65	4.19	3.95
4952916	MT226230	DPCO-230VAC	4.65	4.19	3.95


**DIN Base for
8 Pin Relay**



DIN rail mounting IP20 sockets for 8 pin relays. The multifunction version is designed to accept a multifunction timer module.

Stock No.	Manf Ref'	Type	Unit Price		
			1-24	25-99	100+
4952805	MT78755	DPCO 8PIN	2.42	2.18	2.06
4954054	MT78450	DPCO MULTIFUNCTION	2.57	2.31	2.18

**MT3 Series Relay
10A, 3PCO**

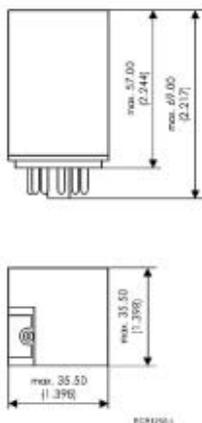

A universal 11 pin 3 pole change over relay rated to 10A. The relays feature a mechanical flag and test lever as standard. LED indication, gold plated or bifurcated contacts and other voltages available on request.

Contact arrangement Three pole changeover
 Contact material Silver nickel
 Continuous current 10A at 230 / 400V ac
 Contact load min 12V/10mA, 20mV/1mA gold flash or bifurcated
 Operate / release time 12 / 5ms
 Nominal coil power 1.2W dc, 2.3VA ac
 Coil resistance.ohm 110 (12Vdc), 475 (24Vdc), 24 (12Vac), 86 (24Vac)
 Mechanical life 20 Million
 Dielectric strength 2500Vrms
 Temperature -40°C to + 60°C
 Approvals VDE, UL, CSA
 L = 35.5, W = 35.5, H = 69

Stock No.	Manf Ref'	Type	Unit Price		
			1-24	25-99	100+
4952792	MT321012	DPCO-12VDC	4.85	4.37	4.12
4952793	MT321024	DPCO-24VDC	4.85	4.37	4.12
4952886	MT326024	DPCO-24VAC	4.85	4.37	4.12
4952802	MT326115	DPCO-115VAC	4.85	4.37	4.12
4952898	MT326230	DPCO-230VAC	4.85	4.37	4.12

**DIN Base for
11 Pin Relay**



DIN rail mounting IP20 sockets for 11 pin relays. The multifunction version is designed to accept a timer module. The multifunction timer provides a wide variety of timing functions from 0.05 S to 240 hours such as delay on, delay off, single hot, flashing and so on. Its supply voltage range is 24 to 240V ac or dc.

Stock No.	Manf Ref'	Type	Unit Price		
			1-24	25-99	100+
4952805	MT78750	3 PCO 11 PIN	2.42	2.18	2.06
4954051	MT78740	3 PCO MULTIFUNCTION	2.57	2.31	2.18
4954334	MTMF0W00	MULTIFUNCTION TIMER MODULE	23.32	20.99	19.82