















F•50

Ø50 mm rubber roller variable length lever


Contact element	
1NO+1NC snap action 	00
1NO+1NC slow action 	01
1NO+1NC slow overlap. 	02
2NO slow action 	03
2NC slow action 	04
2NC snap action 	05
Weight	kg
Pack	pcs
H	mm

Cable entry						
PG 13,5			M20 x 1,5			
Plastic head Plastic body	Metal head Plastic body	Metal head Metal body	Plastic head Plastic body	Metal head Plastic body	Metal head Metal body	Contact travel
E10000FP50	E10000FI50	E10000FM50	E10100FP50	E10100FI50	E10100FM50	
E10001FP50	E10001FI50	E10001FM50	E10101FP50	E10101FI50	E10101FM50	
E10002FP50	E10002FI50	E10002FM50	E10102FP50	E10102FI50	E10102FM50	
E10003FP50	E10003FI50	E10003FM50	E10103FP50	E10103FI50	E10103FM50	
E10004FP50	E10004FI50	E10004FM50	E10104FP50	E10104FI50	E10104FM50	
E10005FP50	E10005FI50	E10005FM50	E10105FP50	E10105FI50	E10105FM50	
0,114	0,16	0,25	0,114	0,16	0,25	
1	1	1	1	1	1	
130 ÷ 170	130 ÷ 170	127,5 ÷ 167,5	130 ÷ 170	130 ÷ 170	127,5 ÷ 167,5	

standard article

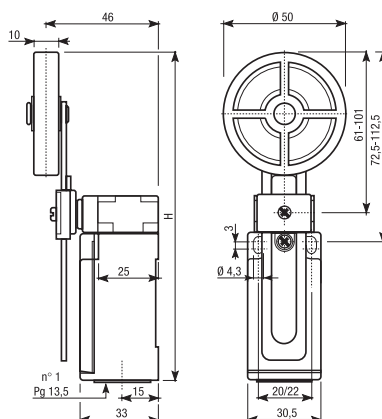

Drive cam operating parameters



φ	V max (m/s)
30°	1,5
45°	1
60°	0,75
60-90°	0,25

Drive forces

Minimum command force	15 Ncm
Minimum forced opening force	35 Ncm