









Thermoplastic roller lever


Contact element	
1NO+1NC snap action 	00
1NO+1NC slow action 	01
1NO+1NC slow overlap. 	02
2NO slow action 	03
2NC slow action 	04
2NC snap action 	05
Weight	kg
Pack	pcs

Cable entry				Contact travel
PG 13,5		M20 x 1,5		
Metal head Plastic body	Metal head Metal body	Metal head Plastic body	Metal head Metal body	
E40000EI	E40000EM	E40100EI	E40100EM	
E40001EI	E40001EM	E40101EI	E40101EM	
E40002EI	E40002EM	E40102EI	E40102EM	
E40003EI	E40003EM	E40103EI	E40103EM	
E40004EI	E40004EM	E40104EI	E40104EM	
E40005EI	E40005EM	E40105EI	E40105EM	
0,285	0,4	0,285	0,4	
1	1	1	1	

 standard article

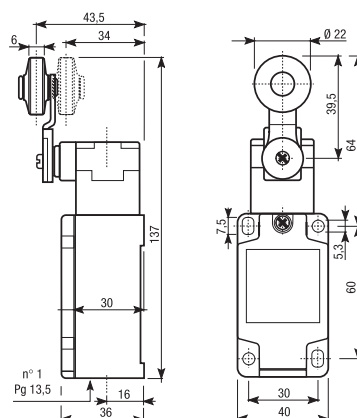

Drive cam operating parameters



φ	V max (m/s)
30°	1,5
45°	1
60°	0,75
60-90°	0,25

Drive forces	
Minimum command force	25 Ncm
Minimum forced opening force	45 Ncm