









Steel roller lever

I-RA


Contact element	
1NO+1NC snap action 	00
1NO+1NC slow action 	01
1NO+1NC slow overlap. 	02
2NO slow action 	03
2NC slow action 	04
2NC snap action 	05
Weight	kg
Pack	pcs

Cable entry				
PG 13,5		M20 x 1,5		
Metal head Plastic body	Metal head Metal body	Metal head Plastic body	Metal head Metal body	Contact travel
E40000IIRA	E40000IMRA	E40100IIRA	E40100IMRA	
E40001IIRA	E40001IMRA	E40101IIRA	E40101IMRA	
E40002IIRA	E40002IMRA	E40102IIRA	E40102IMRA	
E40003IIRA	E40003IMRA	E40103IIRA	E40103IMRA	
E40004IIRA	E40004IMRA	E40104IIRA	E40104IMRA	
E40005IIRA	E40005IMRA	E40105IIRA	E40105IMRA	
0,285	0,4	0,285	0,4	
1	1	1	1	

 standard article

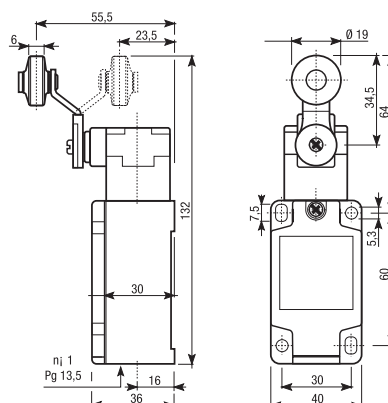

Drive cam operating parameters



φ	V max (m/s)
30°	1,5
45°	1
60°	0,75
60-90°	0,25

Drive forces	
Minimum command force	25 Ncm
Minimum forced opening force	45 Ncm