



**M8 90°  
Connecting Lead**

**Wiring Connections**

	3 wire	4 wire
Pin 1	Brown	Brown
Pin 2		White
Pin 3	Blue	Blue
Pin 4	Black	Black

A M8 right angle connector with 5 metres of cable length available in PVC or PUR material in either a 3 wire or 4 wire version. All connectors have an anti-vibration coupling nut.

Voltage Rating 75 volt DC  
 Current Rating 4 amps  
 IP Rating IP67  
 Wire size 0.34mm≈  
 PVC general purpose, low cost applications.  
 PUR chemical resistance to cutting and lubricating oils

Note: For use with DC sensors only, not compatible with AC

Stock No.	Manf Ref'	Type	Unit Price
			1-4
2667710	403001E03M050	3 WIRE PVC	6.83
2667728	404001E03M050	4 WIRE PVC	7.07
2667713	403001P03M050	3 WIRE PUR	10.10
2667731	404001P03M050	4 WIRE PUR	9.48



**M12 Straight  
Connecting Lead**

**Wiring Connections**

	3 wire	4 wire	5 wire
Pin 1	Brown	Brown	Brown
Pin 2		White	White
Pin 3	Blue	Blue	Blue
Pin 4	Black	Black	Black
Pin 5			Grey

A M12 straight connector with 5 metres of cable length available in PVC or PUR material in either a 3 wire, 4 wire or 5 wire version. All connectors have an anti-vibration coupling nut.

Voltage Rating 300 volt DC  
 Current Rating 4 amps  
 IP Rating IP68  
 Wire size 0.34mm≈  
 PVC General purpose, low cost applications.  
 PUR Chemical resistance to cutting and lubricating oils

Note: For use with DC sensors only.

Stock No.	Manf Ref'	Type	Unit Price
			1-4
2667737	803000E03M050	3 WIRE PVC	7.02
2667761	804000E03M050	4 WIRE PVC	7.19
2667788	805000E03M050	5 WIRE PVC	10.10
2667740	803000P03M050	3 WIRE PUR	8.61
2667764	804000P03M050	4 WIRE PUR	8.58
2667791	805000P03M050	5 WIRE PUR	13.06



**M12 90°  
Connecting Lead**

**Wiring Connections**


	3 wire	4 wire
Pin 1	Brown	Brown
Pin 2		White
Pin 3	Blue	Blue
Pin 4	Black	Black

A M12 right angle connector with 5 metres of cable length available in PVC or PUR material in either 3 wire or 4 wire versions. All connectors have an anti-vibration coupling nut. With an option of LED function indication for PNP outputs if required.

Voltage Rating 300 volt DC (without LED), 30 volt DC (with LED)  
 Current Rating 4 amps  
 IP Rating IP68  
 Wire size 0.34mm≈  
 PVC General purpose, low cost applications.  
 PUR Chemical resistance to cutting and lubricating oils

Note: For use with DC sensors only.

Stock No.	Manf Ref'	Type	Unit Price
			1-4
2667746	803001E03M050	3 WIRE PVC	7.02
2667770	804001E03M050	4 WIRE PVC	7.19
2667782	8040P1E03M050	4 WIRE PVC(LED)	11.94
2667749	803001P03M050	3 WIRE PUR	8.10
2667776	804001P03M050	4 WIRE PUR	8.58
2667785	8040P1P03M050	4 WIRE PUR(LED)	13.23

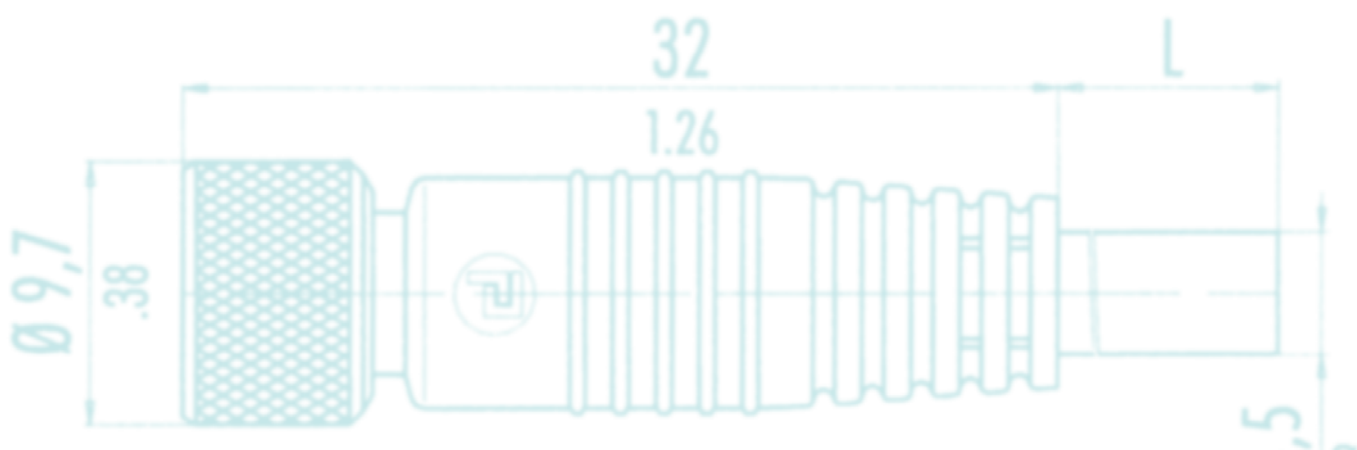

<< 19