



Main

Range of product	Harmony Electromechanical Relays
Product or component type	Plug-in relay
Line Rated Current	5 A
Contacts type and composition	4 C/O
Contacts material	Silver alloy contacts
Contacts usage	Hermetically sealed
Series name	Miniature
[Uc] control circuit voltage	120 V

Complementary

Catalog class	782H
Maximum switching voltage	240 V AC
[Ie] rated operational current	5 A at 120 V AC (on resistive load) 5 A at 240 V AC (on resistive load) 5 A at 30 V DC (on resistive load)
Maximum resistance	3900 Ohm
Connections - terminals	Plug in
Minimum switching current	500 MA 12 V AC 500 MA 12 V DC
Average coil consumption	1.20 VA
Electrical durability	100000 Cycles resistive IEC
Mechanical durability	10000000 Cycles
Response time	20 ms
Dielectric strength	1600 V AC between coil and contact 1600 V AC between poles
Net weight	1.59 Oz (45 g)

Environment

Shock resistance	10 gn
Environmental characteristic	Hazardous location T5 40 °C
Vibration resistance	6 gn 10...55 Hz)
Ambient air temperature for operation	-49...158 °F (-45...70 °C)
Ambient air temperature for storage	-76...185 °F (-60...85 °C)
Product certifications	UL CSA CE
Height	1.28 In (32.5 mm)
Width	0.90 In (22.75 mm)
Depth	1.13 In (28.75 mm)

Ordering and shipping details

GTIN	3606480281044
Nbr. of units in pkg.	1
Package weight(Lbs)	1.59 Oz (45 g)


Packing Units

Unit Type of Package 1	PCE
Package 1 Height	1.13 In (28.75 mm)
Package 1 width	0.90 In (22.75 mm)
Package 1 Length	1.13 In (28.75 mm)
Unit Type of Package 2	CAR
Number of Units in Package 2	100
Package 2 Weight	11.90 Lb(US) (5.4 kg)
Package 2 Height	7.09 In (18 cm)
Package 2 width	10.16 In (25.8 cm)
Package 2 Length	13.19 In (33.5 cm)

Offer Sustainability


Sustainable offer status	Green Premium product
California proposition 65	WARNING: This product can expose you to chemicals including: Nickel compounds, which is known to the State of California to cause cancer, and Di-isodecyl phthalate (DIDP), which is known to the State of California to cause birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov
REACH Regulation	REACH Declaration
REACH free of SVHC	Yes
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope) EU RoHS Declaration
Toxic heavy metal free	Yes
Mercury free	Yes
RoHS exemption information	Yes
China RoHS Regulation	China RoHS Declaration
Environmental Disclosure	Product Environmental Profile
WEEE	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins.

Dimensions

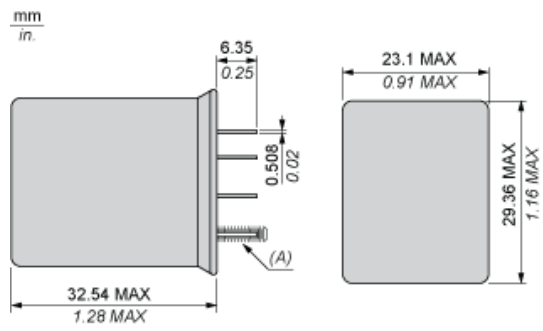

(A) : 0.312 (7.92) LONG #3-48 THREAD

Wiring



Product Life Status : Commercialised